


NO	DESCRIPTION	DATE
△1	∅2.50 → ∅2.40	06.30.03
△E	ERASE WASHER	07.18.03

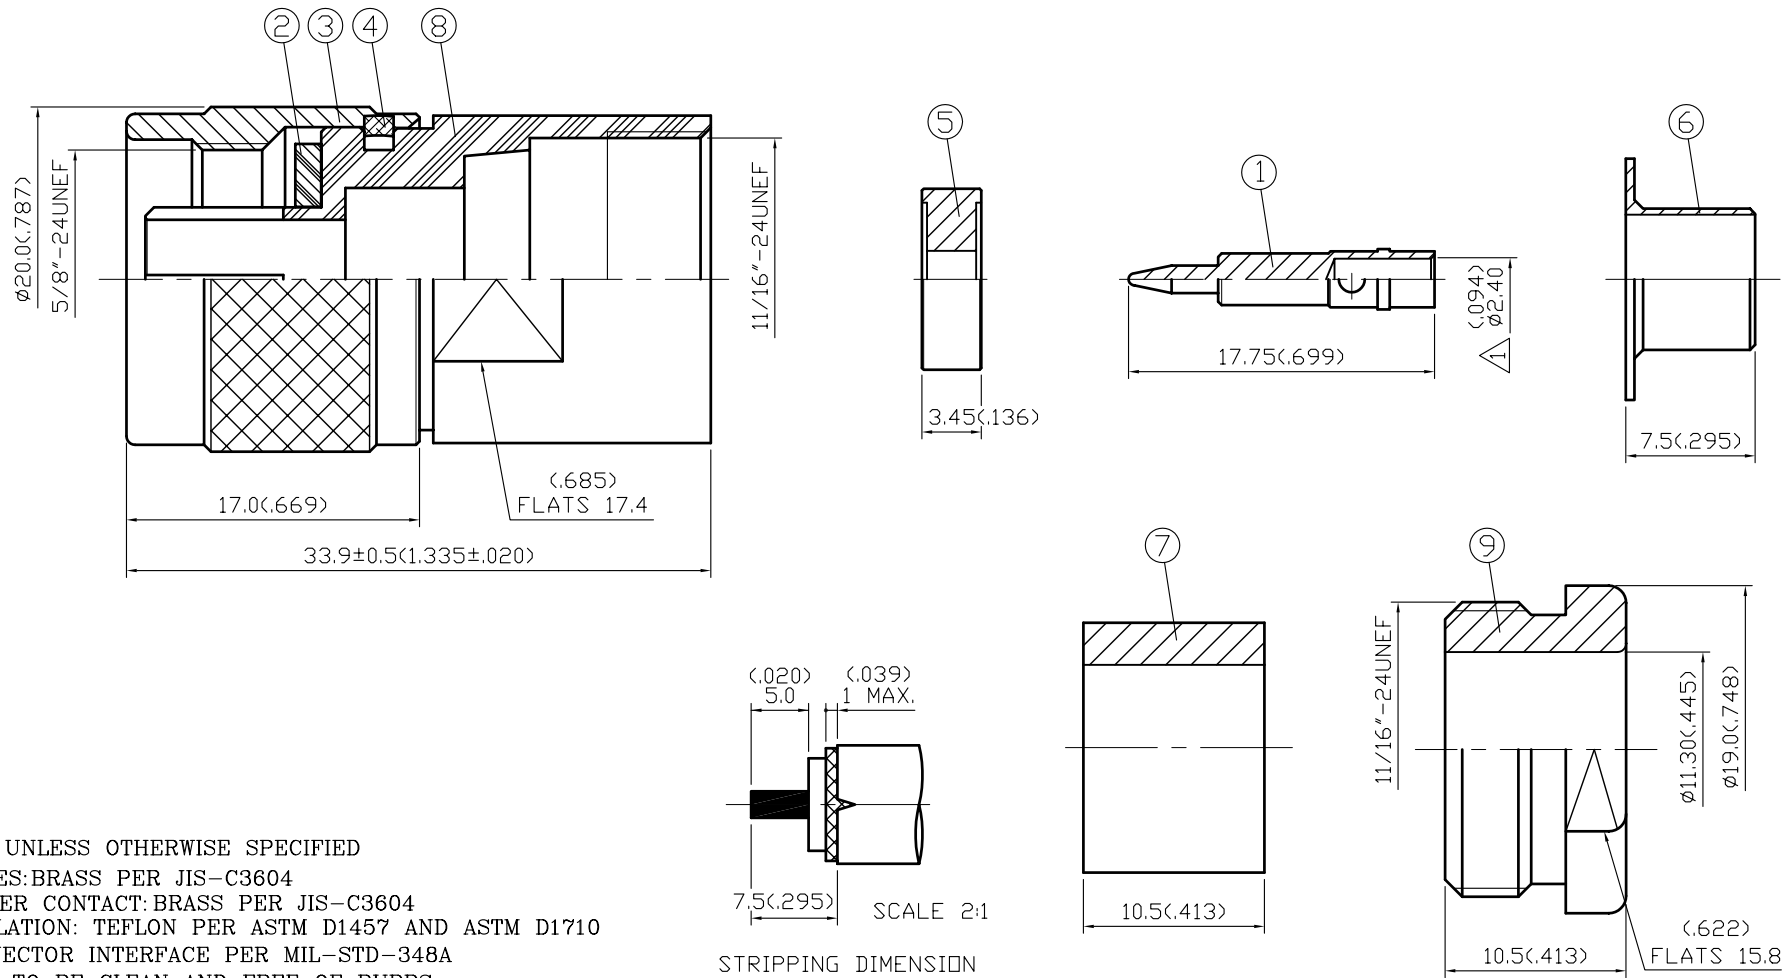

NOTES: UNLESS OTHERWISE SPECIFIED

1. BODIES: BRASS PER JIS-C3604
2. CENTER CONTACT: BRASS PER JIS-C3604
3. INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
4. CONNECTOR INTERFACE PER MIL-STD-348A
5. PART TO BE CLEAN AND FREE OF BURRS

STRIPPING DIMENSION

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
9	NUT	BRASS	1	NICKEL 100 μ" MIN.
8	BODY	BRASS	1	NICKEL 100 μ" MIN.
7	GASKET	SILICONE	1	NONE
6	SLEEVE	BRASS	1	NICKEL 100 μ" MIN.
5	INSULATION	TEFLON	2	NONE
4	WASHER	BRASS	1	NONE
3	SHELL	BRASS	1	NICKEL 100 μ" MIN.
2	GASKET	SILICONE	1	RED
1	CENTER CONTACT	BRASS	1	GOLD

製圖	DRAWN	TOLERANCE	品名	11-01-6 213U (50Ω)	DATE	版次	REV.
	梁齡允						
檢圖	CHECK	.XX ±0.1	單位	DWG.NO.	11-0018		
	沈淑美	.XXX ±0.05	mm(in)				
認定	APPROV	ANGLE ±5°	比例	SCALE			
余賢德			3:1				